




Meramec Energy Center
CCR Surface Impoundment MCPD
(Pond 498)
CCR Unit Closure Plan



**Meramec Energy Center
CCR Surface Impoundment MCPD
(Pond 498)
CCR Unit Closure Plan**

Prepared for

**Ameren Missouri
Project No. 90683
Ameren, Missouri**

**Revision 1
November 2016**

Prepared by

**Burns & McDonnell Engineering Company, Inc.
Kansas City, Missouri**

COPYRIGHT © 2016 BURNS & McDONNELL ENGINEERING COMPANY, INC.

INDEX AND CERTIFICATION

**Ameren Missouri
Meramec Energy Center
CCR Surface Impoundment MCPD (Pond 498)
CCR Unit Closure Plan**

Report Index

<u>Chapter Number</u>	<u>Chapter Title</u>	<u>Number of Pages</u>
1.0	Introduction	1
2.0	Closure Plan	5
3.0	Revisions and Amendments	1
4.0	Record of Revisions and Updates	1
Appendix A	Site Aerial Figure	1
Appendix B	Closure Schedule	1

Certification

I hereby certify, as a Professional Engineer in the state of Missouri, that the information in this document was assembled under my direct personal charge. This report is not intended or represented to be suitable for reuse by Ameren Missouri or others without specific verification or adaptation by the Engineer. I certify that this Closure Plan and the Final Cover System specified herein satisfy the requirements presented in 40 CFR §257.102(b).

Scott A. Martin, P.E.
License Number 2010019572
License renewal date: December 31, 2016.
Pages or sheets covered by this seal: As noted above

TABLE OF CONTENTS

Page No.

1.0 INTRODUCTION 1-1

2.0 CLOSURE PLAN 2-1

 2.1 Facility and Surface Impoundment Description 2-1

 2.1.1 CCR Inventory and Extent..... 2-1

 2.2 Closure Method..... 2-1

 2.2.1 Drainage / Stabilization of CCR Material..... 2-1

 2.2.2 Final Cover System..... 2-2

 2.2.3 Final Cover Schedule..... 2-4

3.0 REVISIONS AND AMENDMENTS..... 3-1

4.0 RECORD OF REVISIONS AND UPDATES..... 4-1

APPENDIX A – SITE AERIAL FIGURE

APPENDIX B – CLOSURE SCHEDULE

LIST OF FIGURES

	<u>Page No.</u>
Figure 2-1: Final Cover System	2-3

LIST OF ABBREVIATIONS

<u>Abbreviation</u>	<u>Term/Phrase/Name</u>
Ameren	Ameren Missouri
BMcD	Burns & McDonnell
CCR	Coal Combustion Residual
CCR Rule	EPA Coal Combustion Rule Published April 17, 2015
CFR	Code of Federal Regulations
Cm/sec	Centimeters per second
CQA	Construction Quality Assurance
CY	Cubic yard
EPA	Environmental Protection Agency
EPDM	Ethylene propylene diene monomer
HDPE	High-density polyethylene
HELP	Hydrologic Evaluation of Landfill Performance
LLDPE	Low-density polyethylene
MCPD	CCR Surface Impoundment MCPD or Pond 498
Meramec	Meramec Energy Center

1.0 INTRODUCTION

On April 17, 2015, the Environmental Protection Agency (EPA) issued the final version of the federal Coal Combustion Residual Rule (CCR Rule) to regulate the disposal of coal combustion residual (CCR) materials generated by electric utilities and independent power producers.

Ameren Missouri (Ameren) is subject to the CCR Rule and is required to develop a Closure Plan for existing CCR surface impoundments per 40 Code of Federal Regulations (CFR) §257.102. This document serves as Ameren's Closure Plan for the existing CCR Unit / CCR Surface Impoundment MCPD (Pond 498) at the Meramec Energy Center (Meramec). The Closure Plan is required to contain the following as required in §257.102(b)(1):

- A description of how the CCR Unit will be closed.
 - For in-place closure: A description of the final cover system, methods for installing final cover system, and methods for achieving compliance with the standards outlined in §257.102(d).
- An estimate of the maximum inventory of CCR material ever stored in the CCR Unit over its active life.
- An estimate of the largest area requiring a final cover as required by §257.102(d) at any time during the active life of the CCR Unit.
- A schedule for completing CCR Unit closure activities, including the anticipated year of closure and major milestones for permitting and construction activities.

Additionally, the CCR Unit will be subject to the post-closure care requirements contained in §257.104, and a Post-Closure Plan has been prepared as a separate, stand-alone document.

2.0 CLOSURE PLAN

2.1 Facility and Surface Impoundment Description

Meramec is located near Oakville, Missouri and consists of four generating units (a site aerial figure is included as Appendix A). Units 1 and 2 are fired on natural gas (fuel switching from coal to natural gas was completed in April 2016), and Units 3 and 4 are fired on coal. CCR generated at the facility includes fly ash and bottom ash.

Surface Impoundment MCPD (Pond 498), referred to herein as MCPD, is located on the northcentral portion of the Meramec facility. As-built construction documents are not available to document that a liner system was installed as part of the initial construction of MCPD; therefore, MCPD has been classified as an existing, unlined CCR surface impoundment. A portion of MCPD was modified following initial construction, and the modified portion includes a high density polyethylene (HDPE) liner. The modified portion is also considered unlined per the CCR Rule.

2.1.1 CCR Inventory and Extent

MCPD has an approximate surface area of 25 acres, as measured within the perimeter dikes, which represents the largest area that would require a final cover. The estimated maximum inventory of CCR in MCPD over its active life is approximately 1,017,000 cubic yards (CY) of CCR material. Ameren periodically removes CCR from MCPD for beneficial use (primarily used for cement kiln raw feed).

2.2 Closure Method

The CCR Rule allows for CCR Units to be closed through removal of CCR or by leaving CCR material in-place. MCPD is planned to be closed with CCR material in-place, and accordingly, will follow the closure performance standards referenced in 40 CFR §257.102(d). If the design or use changes in the future, this Closure Plan will be updated accordingly (see Section 3.0).

2.2.1 Drainage / Stabilization of CCR Material

Prior to installing the final cover system, Ameren will perform the following activities outlined in §257.102(d) of the CCR Rule:

- Eliminate free liquids by removing liquid wastes or solidifying the remaining wastes and waste residues.
- Stabilize remaining wastes sufficiently in order to support the final cover system.

Free liquids will be removed, with excess water discharged under the current NPDES Permit. Free liquid removal will be performed throughout construction, as necessary, to manage surface water and storm water runoff. Once stabilized, the CCR will be compacted and graded to promote drainage.

2.2.2 Final Cover System


The final cover system will be designed and constructed to meet the following criteria pursuant to §257.102(d)(3)(i):

- Have a permeability less than or equal to the permeability of any bottom liner system or natural subsoils present, or a permeability no greater than 1×10^{-5} centimeters per second (cm/sec), whichever is less.
- The infiltration of liquids through the closed CCR Unit must be minimized by the use of an infiltration layer that contains a minimum of 18 inches of earthen material.
- The erosion of the final cover system must be minimized by the use of an erosion layer that contains a minimum of six inches of earthen material that is capable of sustaining native plant growth.
- The disruption of the integrity of the final cover system must be minimized through a design that accommodates settling and subsidence.
- The owner or operator may select an alternative final cover system design, provided the alternative final cover system meets the above requirements.

MCPD will be capped and closed in-place as described herein, and in accordance with the requirements of the CCR Rule. MCPD will be closed using an alternative cover system, which will consist of (from bottom to top):

- Geotextile cushion (to protect the overlying geomembrane),
- 40-mil (minimum) linear low-density polyethylene (LLDPE), high-density polyethylene (HDPE), or ethylene propylene diene monomer (EPDM) geomembrane,
- Synthetic turf.

A typical cross section of this alternative cover system is shown in Figure 2-1.

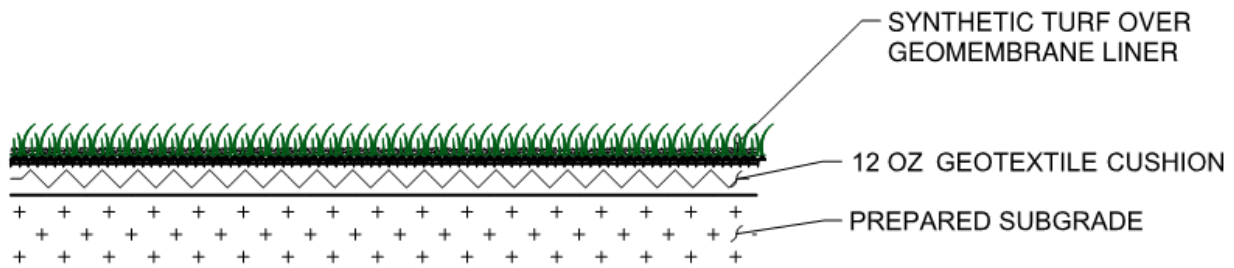Figure 2-1: Final Cover System

A construction quality assurance (CQA) plan will be compiled prior to the commencement of construction, and the CQA program will be implemented during construction of the cover system.

2.2.2.1 Permeability and Infiltration

The federal minimum standard requires MCPD's cover system permeability to be less than or equal to that of the bottom liner, natural underlying subsoils, or 1×10^{-5} cm/sec, whichever is less. As discussed above, construction documents are not available for the initial construction of MCPD. MCPD was reportedly constructed by excavating soils within MCPD (silts and clays), and the excavated materials were utilized for pond berms.

The proposed cover system will feature a geomembrane component which has a permeability of 2.0×10^{-12} cm/sec, which represents the maximum permeability value of the potential geomembrane material types planned to be utilized for closure¹. The alternative final cover system uses a geomembrane component to achieve the minimum permeability requirements of the CCR Rule, rather than relying on the permeability of an 18-inch of infiltration layer.

2.2.2.2 Geometry and Stormwater Management

The geometry and stormwater management controls of MCPD following closure will allow the CCR Unit to meet the following requirements as outlined in §257.102(d) of the CCR Rule:

- Control, minimize, or eliminate, to the maximum extent feasible, post-closure infiltration of liquids into the waste and releases of CCR, leachate, or contaminated run-off to the ground or surface waters or to the atmosphere.
- Prevent future impoundment of water.
- Provide for slope stability to protect against sloughing or movement of the final cover system.

¹ Per the Hydrologic Evaluation of Landfill Performance (HELP) Model User's Guide for Version 3 - EPA/600/R-94/168a.

The closure system will be designed to provide adequate drainage during storm events. Intermediate swales will be utilized to limit the maximum overland flow distance, thereby minimizing ponded water, as well as limiting the infiltration of run-off.

2.2.2.3 Integrity of the Final Cover

Settling and subsidence of the final cover system is expected to be minimal. Settlement would potentially be caused by consolidation of the CCR material, general fill material, or underlying natural subsoils due to the dynamic loads typically resulting from construction activities; consequently, this settlement is expected to be minimal following final cover installation activities. General fill will be installed in a controlled manner to minimize post-fill installation settlement. Maintenance will be conducted as necessary to maintain the integrity of the final cover, as outlined in the Post-Closure Plan for MCPD (separate document).

2.2.3 Final Cover Schedule

According to §257.101 of the CCR Rule, closure of the MCPD will commence no later than six months following the date on which a closure event is triggered. For the purposes of this Plan, closure of MCPD is assumed to have commenced when Ameren has ceased placing CCR material into MCPD and has completed any of the following actions or activities:

- Taken any steps necessary to implement the written Closure Plan.
- Submitted a completed application for any required state or agency permit or permit modification.
- Taken any steps necessary to comply with any state or other agency standards that are a prerequisite, or are otherwise applicable, to initiating or completing the closure of a CCR Unit.

In the event that closure of MCPD is required due to a location restriction or groundwater impacts, but not a safety factor assessment, the CCR unit may continue to receive CCR material beyond the six-month maximum duration, provided that MCPD satisfies the criteria specified in §257.103(a) or §257.103(b).

No later than the date Ameren initiates closure of MCPD, a Notification of Intent to Close the CCR Unit will be prepared. The notification is considered completed when it has been placed in the facility's CCR Operating Record. The notification will then be placed on Ameren's CCR public website within 30 days.

2.2.3.1 Closure Completion

Closure for MCPD shall be completed within five years of commencing closure activities per the CCR Rule. The timeframe for completing closure of the CCR Unit may be extended if Ameren demonstrates that it is not feasible to complete closure of the CCR Unit within the required timeframe due to factors

beyond the facility's control. A demonstration for an extension of the closure timeframe shall be completed pursuant to §257.102(f)(2).

For the purpose of this Closure Plan, closure of MCPD is considered complete when the final cover system is installed and applicable construction completion documentation is finalized. Based on the closure schedule provided in Appendix B, it is estimated that the closure of MCPD will be completed in less than five years. The estimated closure year is 2026.

Within 30 days of completion of closure of MCPD, Ameren will prepare a notification of closure and post it on the facility's CCR Operating Record and on Ameren's CCR public website. This notification shall include certification by a qualified professional engineer, registered in the State of Missouri verifying, that closure has been completed in accordance with this Closure Plan and the requirements of §257.102.

In accordance with §257.102(i), Ameren will record a notation on the deed to the property, following completion of closure. This notation is to inform any potential future owner of the property of the previous use of the land, and that the land is restricted by post-closure care requirements.

3.0 REVISIONS AND AMENDMENTS

The MCPD Closure Plan will be amended whenever there is a change in operation of the CCR unit that affects the current or planned closure operations. The Closure Plan will be amended 60 days prior to a planned change in operation, or within 60 days following an unplanned change in operation. If a written Closure Plan is revised after closure activities have commenced, the written Closure Plan will be amended no later than 30 days following the triggering event. The initial Closure Plan and any amendment will be certified by a qualified professional engineer in the State of Missouri for meeting the requirements of §257.102 of the CCR Rule. All amendments and revisions will be posted on the CCR public website within 30 days following placement in the facility's CCR Operating Record. A record of revisions made to this document is included in Section 4.0 of this document.

APPENDIX A – SITE AERIAL FIGURE



MCPD (POND 498)

MERAMEC
ENERGY
CENTER

MERAMEC RIVER

MISSISSIPPI RIVER




0 150' 300'
SCALE IN FEET

**BURNS
MCDONNELL**

Figure 1
AMEREN MISSOURI
SURFACE IMPOUNDMENT MCPD
SITE AERIAL

APPENDIX B – CLOSURE SCHEDULE

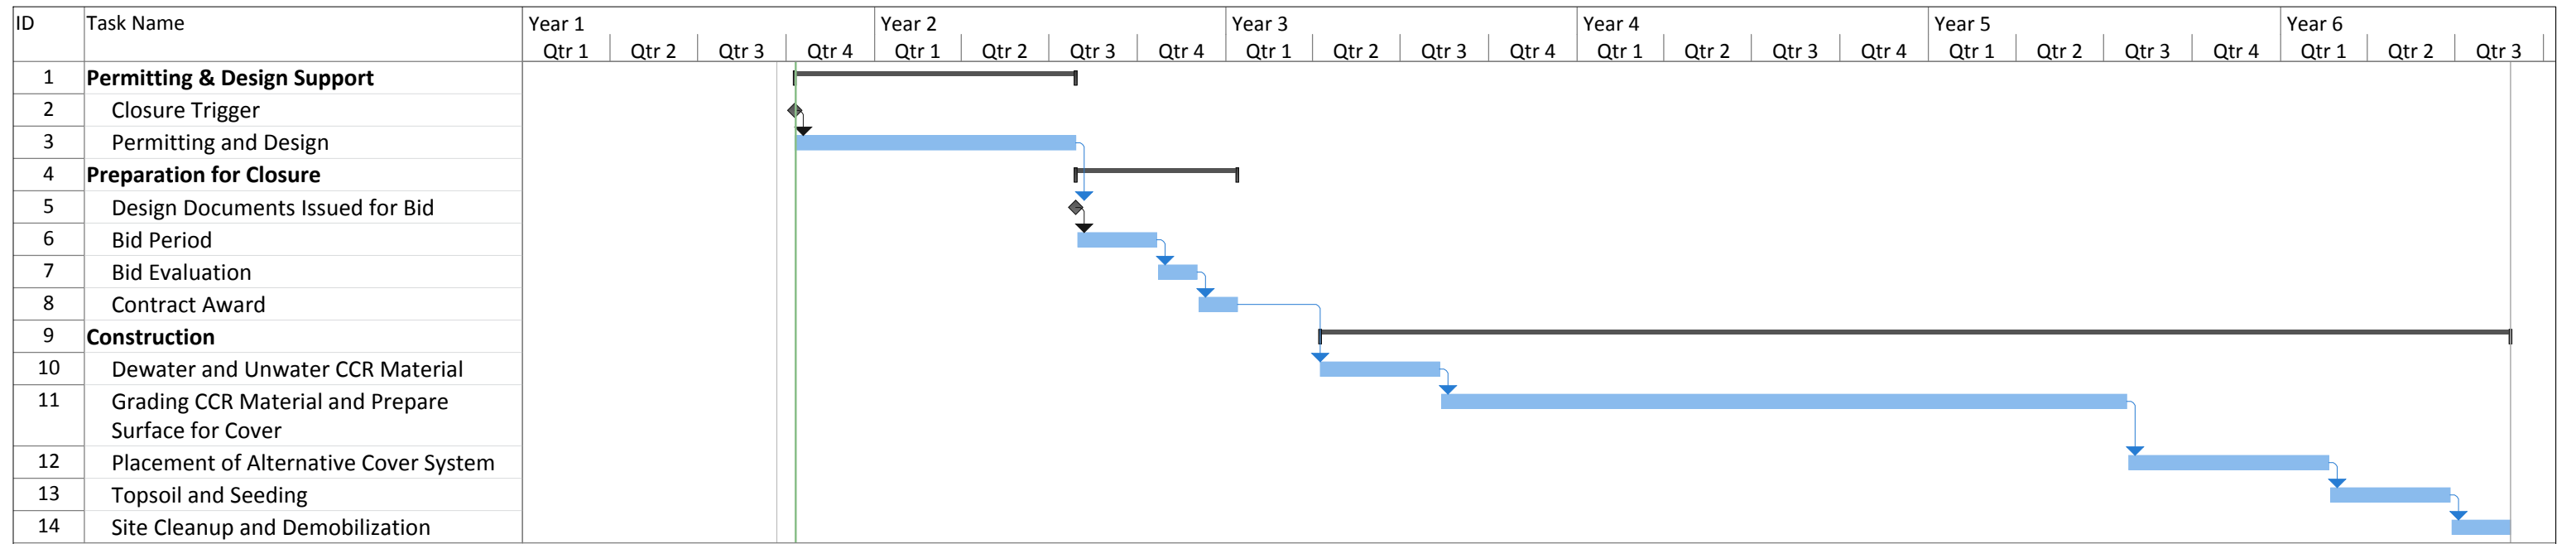

Project: MCPD Impoundment Closure	Task		Project Summary		Inactive Milestone		Manual Summary Rollup		Deadline	
	Split		External Tasks		Inactive Summary		Manual Summary		Progress	
	Milestone		External Milestone		Manual Task		Start-only		Manual Progress	
	Summary		Inactive Task		Duration-only		Finish-only			



CREATE AMAZING.

Burns & McDonnell World Headquarters
9400 Ward Parkway
Kansas City, MO 64114
O 816-333-9400
F 816-333-3690
www.burnsmcd.com